

Ashcroft Gauge Comparators

- 0.25 or 0.1% Accuracy
- Selectable Ranges

These test sets consist of a hydraulic pump and a manifold that are simultaneously connected to

a test gauge and the gauge or unit under test. The 7120P through 7128P are supplied as complete sets with one or more 0.25% test gauges (4 $\frac{1}{4}$ "). The 4577P is a stand-alone pump assembly used with 0.1% test gauges, which are purchased "a la carte," (see note).

SPECIFICATIONS

	7120P	4577P
Accuracy:	0.25% of gauge span	0.1% of gauge span
Operating Pressure:	0–10,000 PSI (60,000 kPa) max.	0–10,000 PSI (60,000 kPa) max.
Pump Body:	Aluminum	Aluminum
Operating Fluid:	SAE 20 automotive or machine oil	SAE 20 automotive or machine oil
Reservoir Volume:	Approximately 1.5 pints	Approximately 1.5 pints


ORDERING INFORMATION

TN7120P-6	Gauge Comparator, 0–150 and 0–600 PSI Ranges (0.25%)
TN7120P-50	Gauge Comparator, 0–150, 0–600, and 0–5000 PSI Ranges (0.25%)
TN7120P-100	Gauge Comparator, 0–150, 0–600, 0–5000, and 0–10000 PSI Ranges (0.25%)
TN7128P-250	Gauge Comparator, 0–1000, 0–4000, and 0–25,000 kPa Ranges (0.25%)
TN7128P-600	Gauge Comparator, 0–1000, 0–4000, 0–25,000, and 0–60,000 kPa Ranges (0.25%)
TN4577P	Precision Gauge Comparator, Without Gauges
TN4721P	SAE 20 Oil (1 Gallon)
TN4723P	Pump Overhaul Kit
CPRE24	Transcat Certified Calibration (per gauge)
DPRE24	Transcat Certified Plus Calibration (per gauge)

TRANSCAT

▶ Visit us at Transcat.com!

35 Vantage Point Drive Rochester, NY 14624
Call 1.800.800.5001

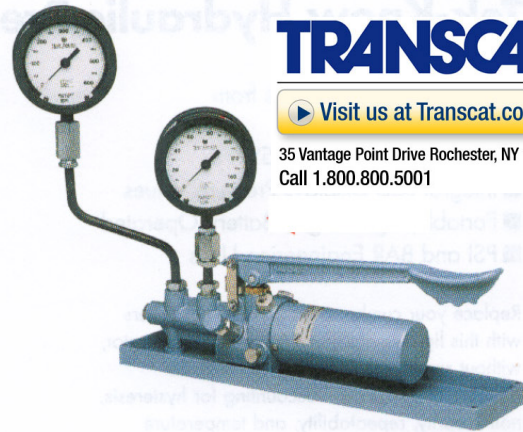

Both Units Include: Hand jack set (A3220), spare "O" rings (4722P), $\frac{1}{4}$ " and $\frac{1}{2}$ " NPT female fittings, (LD227 and LN141), offset pipes for back and bottom bonnet, gauges (LJ227 and LG227), carrying case, and instructions.

7120P Also Includes: 1, 2, 3, or 4 gauges.

TRANSCAT